FIABLE INTERACTIVE FLAT PANEL 75”

WITH INTEGRATED K-12 DIGITAL CONTENT

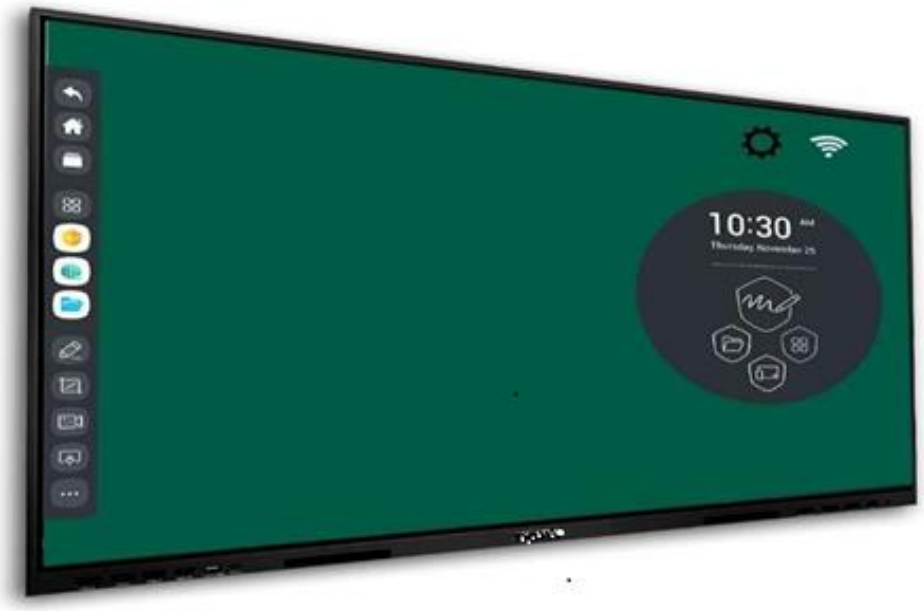

4K
ULTRA HD

BUILD IN
ANDROID

PLUG AND
OPC PC

FEATURES

Zero Bonding
Unmatched Writing Experience

Screen Life
30,000 Hours

Multi-touch
40 points for Win 10/11
20 points for Android

4K Resolution
UHD 3840 * 2160

Android 11 OS
T982 | 4G+32G

Fine Writing
Write simultaneously with different colors and thicknesses automatically

Integrated K-12
Digital Content

Warranty Terms
3 Years

Dual OS
Win 11 & Android
Free to switch

MODEL NO. FH-75-SPCIFICATIO

Panel	Panel Size	**75”**	
	Respond Time	**4ms**	
	Visual Ratio	16:9	
	Panel Type	**LG** IPS Panel	
	Max Visual Area	1432（H）× 807 （V)mm	
	Resolution	3840（H）×2160（V）	
	Pixel pitch	0.372×0.372mm	
	Frequency	60Hz	
	Display Colors	1.07B (10bit)	
	Color Saturability	72%	
	Contrast Ratio (Type)	**4000:1**	
	Viewing Angle	178°(H/V)	
	Light source	DLED	
	Brightness	**400cd**/m2	
	Life Span	≥50000hrs	
Audio-video parameters	Speaker	Soundtrack	2.0
		Power	**2×22W**
Touch parameter	Touch specifications	Non-contact infrared sensing technology	
	Support Systems	Windows10/Windows8/Windows7/Windows XP/Android/Linux/Mac OS X/Chrome	
	Touch Points	20 Points Touch	
	Min. Identifier	2mm	
	Input mode	Opaque object (finger, pen, etc)	
	Respond time	≤10ms	
	Touch depth	±1mm	
	Writing height	≤3mm	
	Writing display	Single Stylus pen two-color	
	Output co-ordinates	32767 (W) x 32767(D)	
System	System Version	Android 11.0	
	CPU	Quad Core A55 2.1 GHz	
	GPU	Mali G52MP2	
	RAM	**4GB / 8GB** (**Optional**) System Memory	
	ROM	**32GB / 128GB (Optional)** System Storage	
Wireless	Bluetooth	Version	5.0
		Working Frequency	2.4GHz
		Working Distance	0~10m
		Remark	Via the wireless module SI07B

	Wi-Fi	Version	802.11ac/b/g/n/a/ax
		Working Frequency	2.4GHz/5GHz
		Working Distance	Upto 10 meters
		Remark	Via the wireless module SI07B
Rear I/O Interface	HDMI IN	2	
	USB 2.0	1	
	USB 3.0	2	
	USB TOUCH PORT	1	
	AUDIO IN	1	
	Line OUT	1	
	Optical OUT	1	
	Display Port (DP)	1	
	VGA input port	1	
	HDMI OUT	1	
	TYPE C PORT	1 FULL FUNCTION	
	RS232	1	
	LAN RJ45 OUT	1	
	LAN RJ45 IN	1	
Front Interface	USB3.0	2	
	TOUCH USB	1	
	HDMI I	1	
	Type-C	**1 (Full functional is Optional)**	
Power	Voltage	100-240V～ 50/60Hz 4A	
	Max. power consumption	280W	
	Standby power consumption	≤0.5W	
Structure	Bare dimension	1676.6mm (W) × 965.2mm (H)	
	Packing dimension	1826×860×240mm	
	Machine + wall mount thickness	116.5mm（WIB9060G）	
	VESA hole site	600×400mm	
	Wall mounting screw specifications	M8×25mm	
	Net weight	56KG	
	Gross weight	61KGS	
Environment	Working temperature	0℃~40℃	
	Working humidity	10%~90%RH	
	Storage temperature	-20℃~60℃	
	Storage humidity	10%~90%RH	
	Working Elevation	<5000m	

Accessories & Product

Power Cable	**3M *1**
Warranty Card	**X 1**
QC Card	**X 1**
Remote Control	**X 1**
Pen	**X 2+2**
Wall Mount Bracket	**X 1**

					
Interactive Whiteboard	**Wall Bracket**	**Remote Control**	**Writing Pen**	**Power Cable**	**Antena**

FIABLE CREATIONS INDIA PVT. LTD.

Plot no. 256/6, office No.304-Jasola, New Delhi, 110025

contact@fiablecreations.com

Contact. No. 8447271340

FIABLE INTERACTIVE FLAT PANEL

WITH INTEGRATED K-12 DIGITAL CONTENT

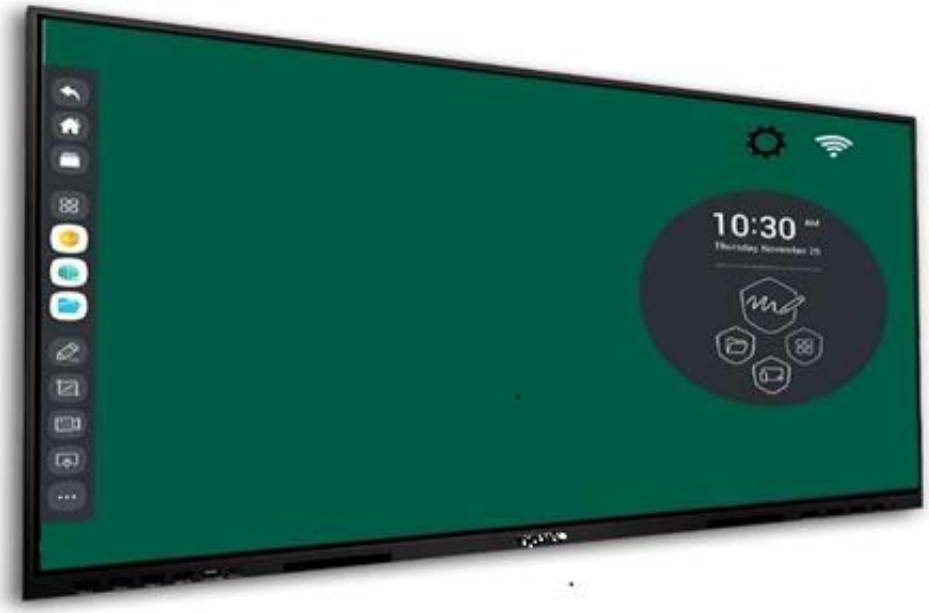

4K
ULTRA HD

BUILD IN
ANDROID

PLUG AND
OPC PC

FEATURES

Zero Bonding
Unmatched Writing Experience

Screen Life
30,000 Hours

Multi-touch
40 points for Win 10/11
20 points for Android

4K Resolution
UHD 3840 * 2160

Android 11 OS
T982 | 4G+32G

Fine Writing
Write simultaneously with different colors and thicknesses automatically

Integrated K-12
Digital Content

Warranty Terms
3 Years

Dual OS
Win 11 & Android
Free to switch

MODEL NO. FH-55-SPCIFICATIO

Panel	Panel Size	**55”**	
	Respond Time	**4ms**	
	Visual Ratio	16:9	
	Panel Type	**LG** IPS Panel	
	Max Visual Area	1432（H）× 807 （V)mm	
	Resolution	3840（H）×2160（V）	
	Pixel pitch	0.372×0.372mm	
	Frequency	60Hz	
	Display Colors	1.07B (10bit)	
	Color Saturability	72%	
	Contrast Ratio (Type)	**4000:1**	
	Viewing Angle	178°(H/V)	
	Light source	DLED	
	Brightness	**400cd**/m2	
	Life Span	≥50000hrs	
Audio-video parameters	Speaker	Soundtrack	2.0
		Power	**2×20W**
Touch parameter	Touch specifications	Non-contact infrared sensing technology	
	Support Systems	Windows10/Windows8/Windows7/Windows XP/Android/Linux/Mac OS X/Chrome	
	Touch Points	20 Points Touch	
	Min. Identifier	2mm	
	Input mode	Opaque object (finger, pen, etc)	
	Respond time	≤10ms	
	Touch depth	±1mm	
	Writing height	≤3mm	
	Writing display	Single Stylus pen two-color	
	Output co-ordinates	32767 (W) x 32767(D)	
System	System Version	Android 11.0	
	CPU	Quad Core A55 2.1 GHz	
	GPU	Mali G52MP2	
	RAM	**4GB / 8GB** (**Optional**) System Memory	
	ROM	**32GB / 128GB (Optional)** System Storage	
Wireless	Bluetooth	Version	5.0
		Working Frequency	2.4GHz
		Working Distance	0~10m
		Remark	Via the wireless module SI07B

	Wi-Fi	Version	802.11ac/b/g/n/a/ax
		Working Frequency	2.4GHz/5GHz
		Working Distance	Upto 10 meters
		Remark	Via the wireless module SI07B
Rear I/O Interface	HDMI IN	2	
	USB 2.0	1	
	USB 3.0	2	
	USB TOUCH PORT	1	
	AUDIO IN	1	
	Line OUT	1	
	Optical OUT	1	
	Display Port (DP)	1	
	VGA input port	1	
	HDMI OUT	1	
	TYPE C PORT	1 FULL FUNCTION	
	RS232	1	
	LAN RJ45 OUT	1	
	LAN RJ45 IN	1	
Front Interface	USB3.0	2	
	TOUCH USB	1	
	HDMI I	1	
	Type-C	**1 (Full functional is Optional)**	
Power	Voltage	100-240V～ 50/60Hz 4A	
	Max. power consumption	280W	
	Standby power consumption	≤0.5W	
Structure	Bare dimension	1220mm (W) × 768.9mm (H)	
	Packing dimension	1496×760×170mm	
	Machine + wall mount thickness	116.5mm（WIB9060G）	
	VESA hole site	600×400mm	
	Wall mounting screw specifications	M8×25mm	
	Net weight	40KG	
	Gross weight	57KGS	
Environment	Working temperature	0℃~40℃	
	Working humidity	10%~90%RH	
	Storage temperature	-20℃~60℃	
	Storage humidity	10%~90%RH	
	Working Elevation	<5000m	

Accessories & Product

Power Cable	**3M *1**
Warranty Card	**X 1**
QC Card	**X 1**
Remote Control	**X 1**
Pen	**X 2+2**
Wall Mount Bracket	**X 1**

					
Interactive Whiteboard	**Wall Bracket**	**Remote Control**	**Writing Pen**	**Power Cable**	**Antena**

FIABLE CREATIONS INDIA PVT. LTD.

Plot no. 256/6, office No.304-Jasola, New Delhi, 110025

contact@fiablecreations.com

Contact. No. 8447271340

fiable

FIABLE INTERACTIVE FLAT PANEL

WITH INTEGRATED K-12 DIGITAL CONTENT

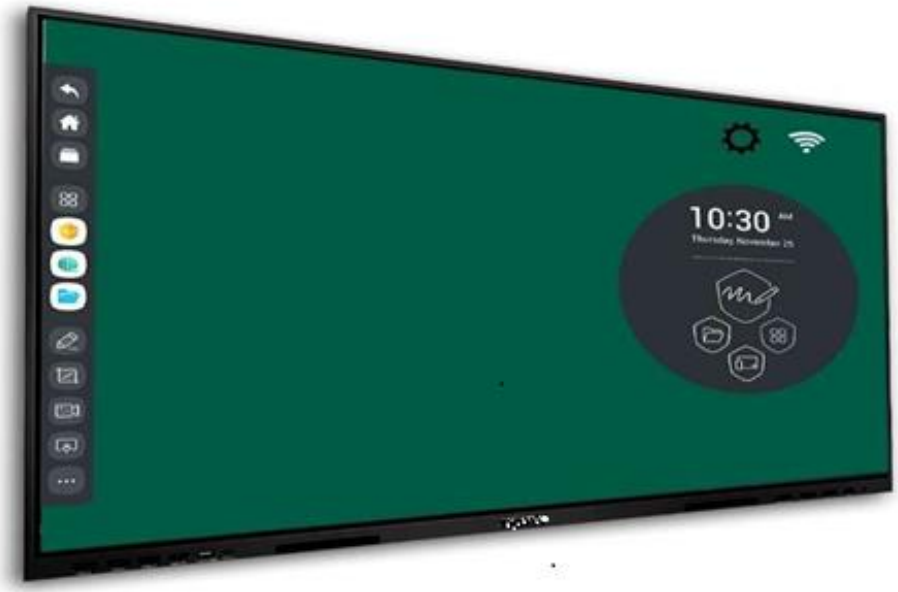

4K
ULTRA HD

BUILD IN
ANDROID

PLUG AND
OPC PC

FEATURES

Zero Bonding
Unmatched Writing Experience

Screen Life
30,000 Hours

Multi-touch
40 points for Win 10/11
20 points for Android

4K Resolution
UHD 3840 * 2160

Android 11 OS
T982 | 4G+32G

Fine Writing
Write simultaneously with different colors and thicknesses automatically

Integrated K-12
Digital Content

Warranty Terms
3 Years

Dual OS
Win 11 & Android
Free to switch

MODEL NO. FH-65-SPCIFICATIO

Panel	Panel Size	**65”**	
	Respond Time	**4ms**	
	Visual Ratio	16:9	
	Panel Type	**LG** IPS Panel	
	Max Visual Area	1432（H）× 807 （V)mm	
	Resolution	3840（H）×2160（V）	
	Pixel pitch	0.372×0.372mm	
	Frequency	60Hz	
	Display Colors	1.07B (10bit)	
	Color Saturability	72%	
	Contrast Ratio (Type)	**4000:1**	
	Viewing Angle	178°(H/V)	
	Light source	DLED	
	Brightness	**400cd**/m2	
	Life Span	≥50000hrs	
Audio-video parameters	Speaker	Soundtrack	2.0
		Power	**2×20W**
Touch parameter	Touch specifications	Non-contact infrared sensing technology	
	Support Systems	Windows10/Windows8/Windows7/Windows XP/Android/Linux/Mac OS X/Chrome	
	Touch Points	20 Points Touch	
	Min. Identifier	2mm	
	Input mode	Opaque object (finger, pen, etc)	
	Respond time	≤10ms	
	Touch depth	±1mm	
	Writing height	≤3mm	
	Writing display	Single Stylus pen two-color	
	Output co-ordinates	32767 (W) x 32767(D)	
System	System Version	Android 11.0	
	CPU	Quad Core A55 2.1 GHz	
	GPU	Mali G52MP2	
	RAM	**4GB / 8GB** (**Optional**) System Memory	
	ROM	**32GB / 128GB (Optional)** System Storage	
Wireless	Bluetooth	Version	5.0
		Working Frequency	2.4GHz
		Working Distance	0~10m
		Remark	Via the wireless module SI07B

	Wi-Fi	Version	802.11ac/b/g/n/a/ax
		Working Frequency	2.4GHz/5GHz
		Working Distance	Upto 10 meters
		Remark	Via the wireless module SI07B
Rear I/O Interface	HDMI IN	2	
	USB 2.0	1	
	USB 3.0	2	
	USB TOUCH PORT	1	
	AUDIO IN	1	
	Line OUT	1	
	Optical OUT	1	
	Display Port (DP)	1	
	VGA input port	1	
	HDMI OUT	1	
	TYPE C PORT	1 FULL FUNCTION	
	RS232	1	
	LAN RJ45 OUT	1	
	LAN RJ45 IN	1	
Front Interface	USB3.0	2	
	TOUCH USB	1	
	HDMI I	1	
	Type-C	**1 (Full functional is Optional)**	
Power	Voltage	100-240V～ 50/60Hz 4A	
	Max. power consumption	280W	
	Standby power consumption	≤0.5W	
Structure	Bare dimension	1488.4×896.6×87.2mm	
	Packing dimension	1630×220×1050mm	
	Machine + wall mount thickness	116.5mm（WIB9060G）	
	VESA hole site	600×400mm	
	Wall mounting screw specifications	M8×25mm	
	Net weight	45KG	
	Gross weight	56KGS	
Environment	Working temperature	0℃~40℃	
	Working humidity	10%~90%RH	
	Storage temperature	-20℃~60℃	
	Storage humidity	10%~90%RH	
	Working Elevation	<5000m	

Accessories & Product

Power Cable	**3M *1**
Warranty Card	**X 1**
QC Card	**X 1**
Remote Control	**X 1**
Pen	**X 2+2**
Wall Mount Bracket	**X 1**

					
Interactive Whiteboard	**Wall Bracket**	**Remote Control**	**Writing Pen**	**Power Cable**	**Antena**

FIABLE CREATIONS INDIA PVT. LTD.

Plot no. 256/6, office No.304-Jasola, New Delhi, 110025

contact@fiablecreations.com

Contact. No. 8447271340